

## 11 SERIES: 11.5 Y

<http://tiny.cc/11seriesEN>**NEW**


MAX LIFTING  
CAPACITY  
**2540**  
kg



ENGINE POWER  
**50**  
hp



SPEED  
**25**  
km/h



FLOW RATE  
**85**  
l/min



LIFT HEIGHT  
**3,7**  
m




**ACI**  
ATTACHMENT  
CONTROL  
INTERFACE


| Model                                          | 11.5 Y                               |
|------------------------------------------------|--------------------------------------|
| Engine                                         | Yanmar 4TNV88 - 4 cylinder - 2190 cc |
| Emission Standard                              | Stage IIIA                           |
| Power (Iso Gross) / Torque                     | 50 HP / 140 Nm @ 1200 rpm            |
| Fuel                                           | Diesel                               |
| Transmission                                   | Hydrostatic OneDrive                 |
| Drive speed (max.) - 2 speed <sup>(1)</sup>    | 12-25 km/h (7.5-15.5 mph)            |
| Aux. hydraulics oil flow                       | 85 l/min (22.5 GPM)                  |
| Max. lifting height                            | 3,7 m (145.6 in)                     |
| Tipping load, max. <sup>(2)</sup>              | 3180 kg (7010 lbs)                   |
| Lifting capacity straight, max. <sup>(3)</sup> | 2540 kg (5600 lbs)                   |
| Breakout force / 50 cm                         | 3000 kg (6614 lbs)                   |
| Pushing force (c)                              | 2650 kgf (2650 kp)                   |
| Average ground pressure (w/standard tires)     | 915 kg/m <sup>2</sup> (188 lbs/sqft) |
| Turning radius: inside/outside                 | 1135/2635 mm (44.7/ 103.7 in)        |
| Standard tires (Tractor profile)               | 400/50-15                            |
| Weight                                         | 2280 kg (5026 lbs)                   |
| Product Code                                   | C968000                              |

<sup>(1)</sup> Maximum speed that can be achieved with the largest diameter tires available, on a flat surface and machine without attachments.

<sup>(2)</sup> Tipping limit, when the machine is straight, with rear weights and boom lifted just off the ground. Weight of attachment included.

<sup>(3)</sup> Maximum load that can be lifted just off the ground when the machine is straight and with rear weights. Weight of attachment is included.

Note: Refer to the Operator's manual for the comprehensive load diagram.

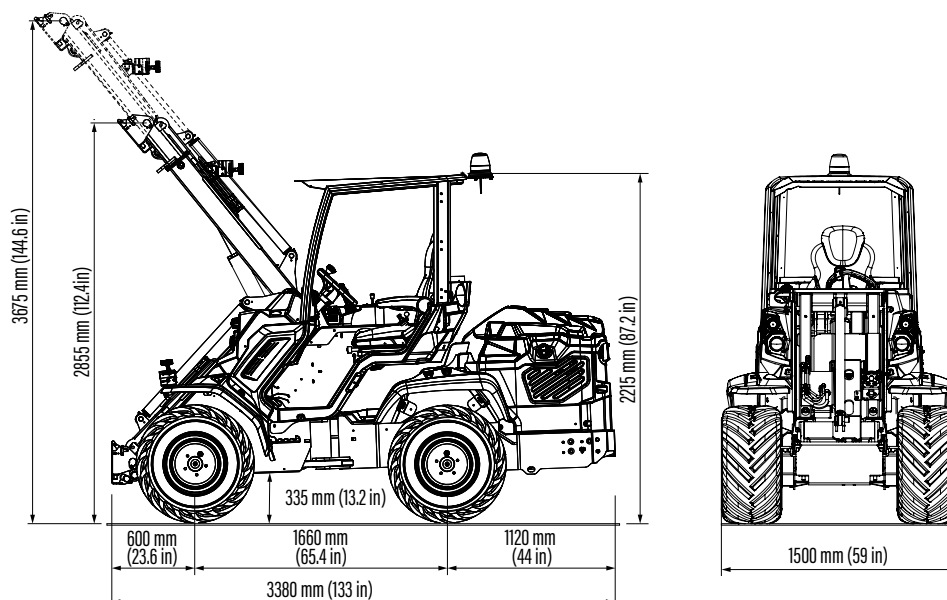

| Tires size              | Height            | Width           |
|-------------------------|-------------------|-----------------|
| 380/55-17               | 2240 mm (88.2 in) | 1500 mm (59 in) |
| 400/50-15 (31X15.50-15) | 2215 mm (87.2 in) | 1500 mm (59 in) |

## FEATURES

- Yanmar 4TNV88 4 cyl., 2190 cc, diesel engine, water cooled with electric start, glow plug
- STAGE IIIA
- **OneDrive System:** DBS (Dynamic Block System) and Cruise Control (optional) activated by Joystick
- ACI with Multi-functions joystick (22 functions)
- Unbreakable Body Panels
- 2 Speed
- Hydraulically pilot operated variable displacement drive pump
- Hi-Flow system
- Self-locking multi-disk parking brake
- Self-levelling double-H telescopic boom
- Radial Piston high efficiency and heavy duty wheel motors
- 4WD hydrostatic Direct Drive motors, proportional servo control
- Hydraulic oil cooler
- Hydraulic multiconnector
- ROPS-FOPS Level I
- LCD graphic display with programmed service
- 2 front working light
- Fully adjustable suspension heated seat with armrests and seat belt

## 11 SERIES - OPTIONS

| Options                                                                                                        | Code    |
|----------------------------------------------------------------------------------------------------------------|---------|
| 110 V engine block heater                                                                                      | C885255 |
| 220 V engine block heater                                                                                      | C885250 |
| 2" Hitch receiver (not compatible with C883037)                                                                | C883063 |
| 3 additional working halogen light                                                                             | C883064 |
| 3 additional working LED light                                                                                 | C883018 |
| A/C system with heating for fully enclosed cab - for 11.6 K and 11.9 K<br>(C883001 required - not aftermarket) | C883902 |
| A/C system with heating for fully enclosed cab - for 11.5 Y<br>(C883001 required - not aftermarket)            | C883900 |
| Additional front hydraulic outlets                                                                             | C883082 |
| Attachment coupling plate for rear mounting (not compatible with C883037)                                      | C880031 |
| Automatic locking plate                                                                                        | C883008 |
| Backup warning beeper                                                                                          | C883021 |
| Beacon light                                                                                                   | C883039 |
| Biodegradable oil                                                                                              | C883032 |
| Cruise Control for 11.5 Y                                                                                      | C883081 |
| Driver area cover                                                                                              | C880049 |
| Flat face coupling kit                                                                                         | C880221 |
| Floating boom valve                                                                                            | C883011 |
| Fully enclosed cab with sound insulation linen                                                                 | C883001 |
| GPS tracker                                                                                                    | C883075 |
| Heating system for 11.6 K and 11.9 K                                                                           | C883074 |
| Heating system for 11.5 Y                                                                                      | C883072 |
| Left protection bar for operator                                                                               | C883020 |
| Mirrors                                                                                                        | C880081 |
| OneDrive (OneDrive, DBS, Cruise Control and Torque Divider) for 11.6 K and 11.9 K                              | C883811 |
| OneDrive (OneDrive, DBS) for 11.5 Y                                                                            | C883813 |
| Polycarbonate back window (smart cabin)                                                                        | C883035 |
| Polycarbonate right side (smart cabin)                                                                         | C883034 |
| Polycarbonate windscreen (smart cabin)                                                                         | C883000 |
| Rear 12V electric socket                                                                                       | C883023 |

## 11 SERIES - OPTIONS

| Options                                                                                                                                                                      | Code           |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| Rear bull bar with side extensions (not compatible with C883032, C885017 and C88031)                                                                                         | <b>C883037</b> |
| Rear hydraulic outlets - double                                                                                                                                              | <b>C883016</b> |
| Rear hydraulic outlets - single                                                                                                                                              | <b>C883015</b> |
| Rear weights (440 kg / 970 lbs)                                                                                                                                              | <b>C885025</b> |
| Rear side weights 80 kg (40 kg + 40 kg) / 176 lbs (88 lbs + 88 lbs)                                                                                                          | <b>C883069</b> |
| Rear side weights 160 kg (2x40 kg + 2x40 kg) / 352 lbs (2x88lbs+2x88lbs)                                                                                                     | <b>C883077</b> |
| Rear weights 180 kg (90 kg + 90 kg) / 396 lbs (198lbs + 198 lbs)                                                                                                             | <b>C880054</b> |
| Rubber tracks for 11 series<br>(The kit weights 750 kg / 1655 lbs and increases the height of the machine by 1,5 cm / 0,6 in on 11.6 K / 11.9 K and 6 cm / 2,4 in on 11.5 Y) | <b>C883107</b> |
| Snow chains for wheels, 31x15.50-15, set of 2                                                                                                                                | <b>C880044</b> |
| Tie down bracket on wheel hub, set of 4                                                                                                                                      | <b>C883065</b> |
| Tractor tires 400/50-15 (31x15.50-15), set of 4                                                                                                                              | <b>C884016</b> |
| Tractor tires 380/55-17, set of 4 - 11.5 Y                                                                                                                                   | <b>C884018</b> |
| Trailer coupling (not compatible with C883037)                                                                                                                               | <b>C885017</b> |
| Turf tires 400/50-15 (31x15.50-15), set of 4                                                                                                                                 | <b>C884013</b> |
| Turf tires 380/55-17, set of 4                                                                                                                                               | <b>C884017</b> |
| Warning & Safety lights for road travel (with mirrors)                                                                                                                       | <b>C883010</b> |
| Wheel spacer 10 mm (0.4 in), set of 4 (max. 1 pcs for wheel)                                                                                                                 | <b>C880090</b> |
| Wheel spacer 55 mm (2.2 in), set of 4 (max. 1 pcs for wheel)                                                                                                                 | <b>C885010</b> |